



OLIEOPVANGBAK VOOR OLIETRANSFORMATOREN

Voordelen:

- op maat gemaakt
- snelle levering
- interessante prijzen
- eigen transport
- eigen productie inclusief lakwerk
- standaard in Ral 7033, andere kleuren zijn ook mogelijk



info@jowe.be



0032(0)89.56.52.78

Technische fiche metalen olieopvangbak voor olietransformator

Toepassing:

- Voor nieuwe op te stellen transformatoren en reeds opgestelde transformatoren om zo de olie op te vangen bij een lek aan de transformator

Materiaal:

- 2mm staalplaat

Oppervlakte:

- Selemix Direct PU 2 componenten technologie DTM verf Ral 7033

Dichting:


- Versachem high temp red silicone Type 650, technische fiche (zie volgende pagina)
- Oppervlakken moeten zuiver en vetvrij zijn alvorens de silicone aan te brengen.

Uitvoeringen:

- Demontabele afsluitplaat op één lange zijde van de opvangbak
- Demontabele afsluitplaat op één korte zijde van de opvangbak
- Demontabele afsluitplaat op één korte en één lange zijde van de opvangbak
- Voorzien van 4st. hijsogen op de 4 hoeken van de opvangbak
- Verschillende maten

Plaatsing:

- De olieopvangbakken moeten geplaatst worden op een vlakke, zuivere vloer.

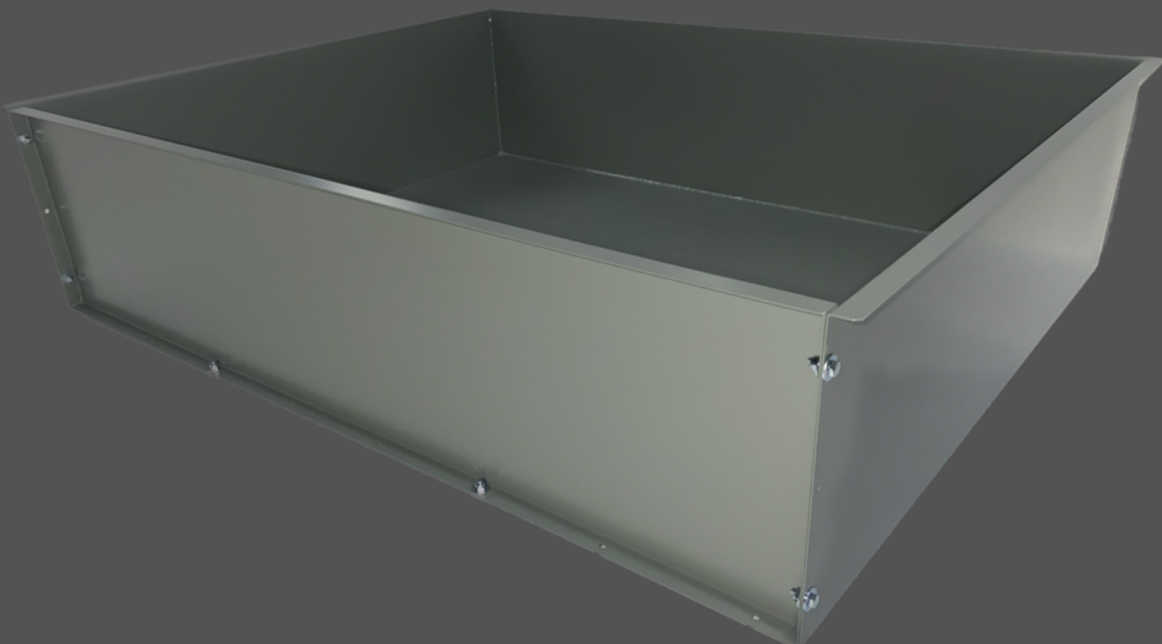

Technische fiche van de dichting



2107 West Blue Heron Blvd.
Riviera Beach, FL 33404
Phone: 561-845-2425
Toll Free: 800-327-6880
www.itwconsumer.com

Hi-Temp Red Silicone Technical Data Sheet

Rev 02/08

PRODUCT DESCRIPTION: Hi-Temp Red Silicone is a high performance, single component, moisture curing RTV (room temperature vulcanizing) silicone gasketing material that cures into a strong, silicone rubber that maintains long term durability and flexibility. Hi-Temp Red Silicone is a non-slumping, paste-like consistency which cures when exposed to moisture in the air. Excellent for filling gaps, use for sealing, bonding weatherproofing and caulking applications. Forms a tough, flexible silicone rubber gasket that resists aging, weathering; will not harden, shrink or crack.

WORKS BEST ON: Use to replace gaskets on valve covers, water pumps, oil pans, rear end covers, thermostat housings, timing gear covers and wherever you need a leakproof gasket.

(OEM Approved = Original Equipment Manufacturer Approved)

PRODUCT FEATURES:

- Tensile Strength: 310 psi
- Non-Flammable
- Low Volatile, Oxygen Sensor Safe
- Color: Red
- Water Resistant
- Set Time: 8 – 10 Minutes
- Full Bond: 12 – 24 Hours (Cure times will vary with temperature, humidity and gap)
- Temperature Range: Continuous: -65°F to 600°F
Intermittent: -65°F to 650°F
- Chemical Solvent Resistance: oil, water and antifreeze mixtures
- NOT RECOMMENDED for use on parts in constant contact with gasoline.**
- Storage: Store in a cool, dry environment.

SURFACE PREPARATION: Protect work area from accidental spills. Clean surface with a residue-free solvent to remove grease, oil, dirt or other contaminants.

REMOVAL METHODS: (test inconspicuous area of item to be sure chemicals do not harm surface)

Before cure: Scrape off excess with a knife or non-flammable cleaning fluid. If skinned over, break film with a dry cloth and remove as much as possible. Remove any remaining material with a gasket remover.

After cure: Scrape or peel off, then solvent clean surface.

HELPFUL HINTS: Clean and dry surfaces thoroughly. Apply a thin even bead (1/8") to one surface. Wait 10 minutes until sealant skins before assembling. For temporary assemblies, apply a light coat of oil to uncoated surfaces, then assemble. Clean excess with a knife. Replace cap after use. Sealant is fully cured in 12-24 hours.

Higher humidity accelerates the cure of the silicone adhesives. Parts should be mated and the sealants worked (tooled) before the adhesive surface "skins over" or becomes tack free, normally within 30 minutes at 50% relative humidity and 75°F.

For storage: after use, create a silicone plug by pushing excess material to extend beyond the extension nozzle and allow to cure (this will seal and protect unused product). To reuse, simply remove the cured "plug" from tip.

Note, the curing process of High Temp Red Silicone can cause corrosion to some surfaces. For critical applications refer to our Mega Silicones, which are non-corrosive, low odor and low volatile.

See MSDS for more complete information, safe handling instructions and first aid.

Non-Regulated

Part Number(s): 65309



The technical data contained herein are intended as a reference only